
HIGH SPEED ROUTET

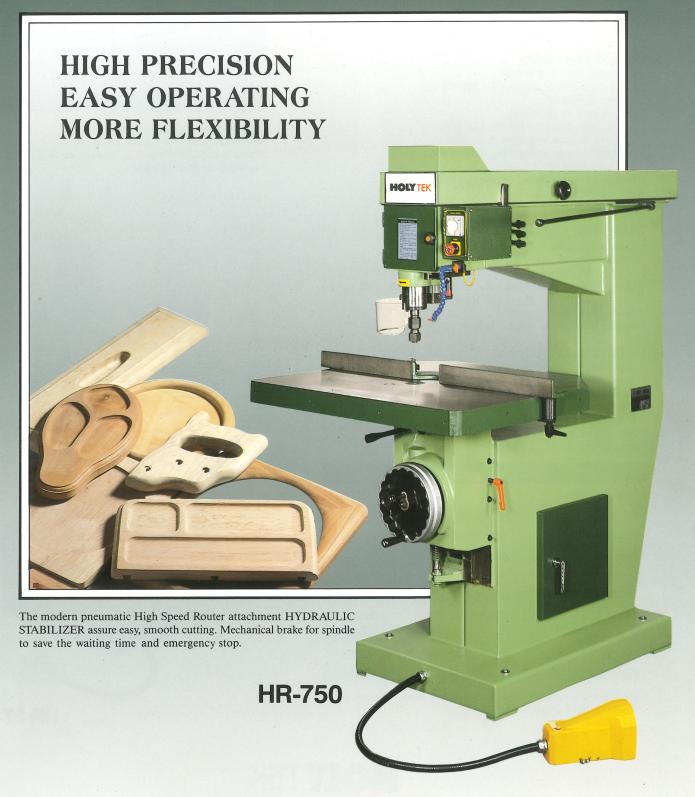

HOLYTEK

THE BEST EFFICIENCY AND ECONOMY ROUTERS

DESIGN FEATURES

- * Pneumatic control of spindle.
- * Hydraulic stabilizer standard for HR-750 and optional for HR-67.
- * Easy control air pedal unit.
- * All cast iron frame for HR-67, 3pcs high precision bearings supported shaft.
- * Mechanical brake standard for HR-750 and optional for HR-67.
- * Nickel-chromium coating of spindle column and accurate grinding.
- * Air blowpipe.

STANDARD EQUIPMENT

- * Table guide fence.
- * Collect: 1/4", 3/8", 1/2" (for HR-750) 1/4", 1/2" (for HR-67)
- * Guide pin: 4-6.4mm, 7.9-9.5mm, 12-18mm (for HR-750) 6, 9, 12, 16mm (for HR-67)
- * Plastic guard.
- * Service wrenches & hexagon keys.

OPTIONAL EQUIPMENT

- * Dust hood with brush for spindle.
- * Tilting table.
- * Extension table.
- * MK2 changeable spindle.

SPECIFICATION

MODEL		HR-750	HR-67
Throat clearance	(mm)	750	670
Spindle speed	(r.p.m.)	10000/20000	20000
Spindle motor	(HP)	5(7½HP optional)	3(5,7½HP optional)
Vertical stroke of spindle	(mm)	100	80
Clearance between chuck and table	(mm)	285	300
Depth end stops		6	5
Table size	(mm)	905×765	800×600
Overall dimensions	(mm)	$905 \times 1380 \times 1680$	800×1285×1800
N.W/G.W	(kgs)	650/800	560/710
Packing size	(mm)	$1055 \times 1530 \times 1830$	$930 \times 1350 \times 1900$

^{*} All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.



Automatic copying system

It's including ½HP two speed motor, pneumatic control clamp the jig and feeding by two rubber feed rollers. Optional for HR-750 only.



HR-67



HOLYTEK INDUSTRIAL CORP.

9F-1, NO.400, SEC.1, CHANG PING RD., TAICHUNG, TAIWAN, R.O.C. TEL: 886-4-22452818 (REP.) FAX: 886-4-22436928
E-mail: holytek@ms13.hinet.net
http://www.holytek.com.tw