

Dust Extractors

**CE CERTIFIED
ALL SERIES**

CE

DC-201H




The DC series offer you a range of Extractors with quality features at affordable prices.

All steel fans avoid damage from any wooden blocks inadvertently extracted.

For power 2HP and over, their top bags are w/needle felt material and density of 2 micron is "CE" standard requirement, bottom bags are w/thickness plastic material ; all bags are with patent adjustable spring metal clamp.

HOLYTEK

HOLYTEK BRING YOU A WORLD OF DEPENDABLE DUST EXTRACTORS WITH REALLY EUROPEAN CE STANDARD SPECIFICATIONS. THE PERFORMANCES OF OUR QUALITY PRODUCTS ARE THE ONE YOU CAN RELY ON.

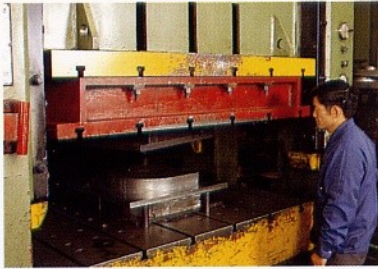

The blower casting is one piece, fabricated by a high performance hydraulic forming machine.



The blower casing is welded by a seam welding machine to ensure uniform welding result and a smooth welding surface.



Blower fan balance test to ensure long service life of bearings, vibration free running and steady air flow.

FINAL PERFORMANCE TEST FOR DUST EXTRACTOR



Motor performance test for current, voltage, and resistance.

Final performance test for dust extractor.



Assembling line.

This comprehensive test includes: Wire and connection test, switch wiring motor loading voltage, insulation, and motor running direction.



DC-101H



DC-99



DC-80H



DC-90C



DC-101



DC-50P



DC-50S

SPECIFICATION

MODEL	DC-50P(50S)	DC-90C	DC-80H	DC-99	DC-101(101H)
Motor	3/4HP	3/4HP	3/4HP	3/4HP	2HP
Blower wheel	228mm ϕ	228mm ϕ	228mm ϕ	228mm ϕ	305mm ϕ
Inlet dia.	125mm ϕ x 1	-	125mm ϕ x 1	125mm ϕ x 1	125mm ϕ x 1
Outlet dia.	100mm ϕ x 2	100mm ϕ x 1	100mm ϕ x 2	100mm ϕ x 2	100mm ϕ x 2
Air speed (capacity)	19M ³ /min	19M ³ /min	19M ³ /min	19M ³ /min	30M ³ /min
Bag dia.	340mm ϕ	370mm ϕ	280mm ϕ	430mm ϕ	500mm ϕ
Top bag length	-	620mm	680mm	620mm	820mm
Bottom bag length	600mm	620mm	750mm	800mm	820mm
Packing size (cm)	52x42x46	67x47x47	75x45x50	46x47x44 84x40x13	92x58x58 (101) 56x56x54 (101H) 88x56x12
N.W./G.W. (kgs)	21/23	33/36	33/36	25,8/27,9	56/61 (101) 45,11/47,12 (101H)



DC-201

DC-202HD

DC-203F

DC-203N

SPECIFICATION

MODEL	DC-201(201H)	DC-202HD	DC-203N	DC-203F
Motor	3HP	4HP	5HP	5HP
Blower wheel	305mm ϕ	330mm ϕ	330mm ϕ	330mm ϕ
Inlet dia.	150mm ϕ	225mm ϕ	225mm ϕ	225mm ϕ
Outlet dia.	100mm ϕ X3	100mm ϕ X4	100mm ϕ X 4 or 125mm ϕ X 3	100mm ϕ X 4 or 125mm ϕ X 3
Air speed (capacity)	52M ³ /min	72M ³ /min	98M ³ /min	98M ³ /min
Bag dia.	500mm ϕ	500mm ϕ	600mm ϕ	600mm ϕ
Top bag length	820mm	1200mm	1800mm	1800mm
Bottom bag length	820mm	1000mm	1200mm	1200mm
Packing size (cm)	131x58x58 (201) 86x58x59 (201H) 65x24x21	126x75x72	134x97x77	140x78x78
N.W./G.W. (kgs)	68/75 (201) 65,5/71,7 (201H)	130/180	121/178	126/183

* All specifications, dimensions and desing characteristics shown in this catalogus are subject to change without notice.

HOLYTEK

HOLYTEK INDUSTRIAL CORP.

9F-1, NO.400, SEC.1, CHANG PING RD., TAICHUNG, TAIWAN, R.O.C.

TEL: 886-4-22452818 (REP.) FAX: 886-4-22436928

E-mail: holytek@ms13.hinet.net

http://www.holytek.com.tw